

LIVING DISTRICT

Collection: Marlow

Installation manual for:

LD6011D18 D18"H22.5" L4


Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws (P2) in side of top unit the mounting bracket.
6. Put the lamp arm(P10) to the corresponding position.
7. Hang the inside frame to the hold of the outside frame.
8. Hang the lamp body to the chain(P8) and connect the canopy lock(P7).
9. Put the canopy(P3) on the nipple(P4) and connect the canopy lock(P7), then use the canopy ring(P6) to screw tighten.
10. Install E12 light source, no include bulb.

PARTS LIST

part	picture	Description	Qty	Check list
P1		L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		D5.1" Canopy cover	1	
P4		Nipple	1	
P5		Power Cord 8.4', 18AWG, SPT-1 Clear	1	
P6		Canopy ring	1	
P7		Canopy lock	1	
P8		L5' CHAIN04P Plain Design	1	
P9		D1.5" Loop	2	
P10		W7.63"*L17.3" Arm	6	
P11		Washer	1	
P12		D5.6"*H1.3" Receiver bowl	2	
P13		Hook	1	
P14		L9" Both end threaded pipe	1	
P15		D1.97" Metal Wire Box	1	
P16		D0.87"*L2.36" Candle cover	4	
P17		E12 Socket	4	
P18		D2.36" Lamp holder	4	
P19		L3.58" Arm	4	
P20		D2" Wire Box	1	
P21		D4.72" Around metal plate	2	
P22		D5.51" Around metal plate	2	
P23		Cap nut	3	

The end!

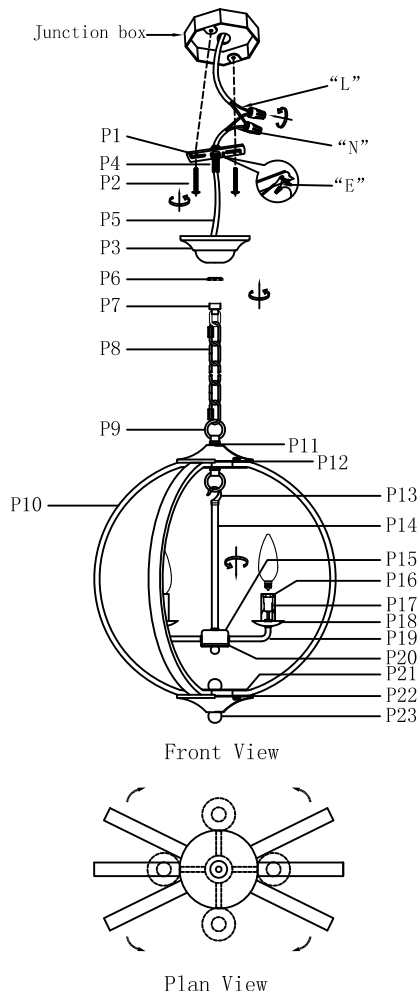

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire